


CC-17 SERIES

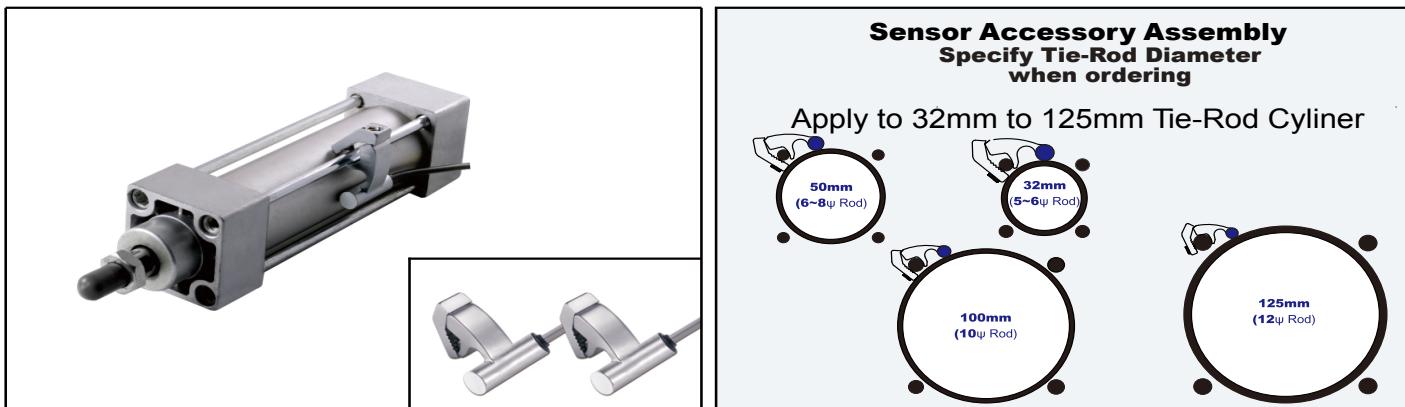

SPECIFICATION

TYPE CHARACTERISTIC	CC - 17R	CC - 17RV	CC - 17DF	CC - 17N(P)	CC - 17S	
SWITCHING LOGIC	SPST Normally Open		Normally Open	Solid State Output, Normally Open		
SENSOR TYPE	Reed Switch		2 Wire Solid State	NPN Current Sinking(PNP Current Sourcing)	NPN/PNP Automatic Detection	
OPERATING VOLTAGE	5 ~ 240V DC/AC		10 ~ 28V DC		5 ~ 30V DC	
SWITCHING CURRENT	0 ~ 100 mA	0 ~ 500 mA	1 ~ 50 mA		0 ~ 200 mA	
SWITCHING RATING	10 W Max.		1.4 W Max.		6 W Max.	
CURRENT CONSUMPTION	—		40 μA Max. @ 24V		7.5 mA Max. @ 24V	
VOLTAGE DROP	2.5V Max. @ 100mA DC	0.9V Max. @ 500mA DC	2.65V Max. @ 50mA DC	0.5 V Max. @ 200 mA DC	1 V Max. @ 200 mA DC	
LEAKAGE CURRENT	—		90 μA Max. @ 28V		0.01 mA Max.	
INDICATOR	Red LED	Yellow LED	Red LED	Red LED(Green LED)	Red LED	
CABLE	Grey Oil-Resistant PVC		Black Oil-Resistant PVC		Black Oil-Resistant PVC	
SENSITIVITY	55 ~ 65 Gauss		40 ~ 800 Gauss		40 ~ 800 Gauss	
SWITCHING FREQUENCY	200 Hz		1000 Hz		5000 Hz	
TEMPERATURE RANGE	-10 ~ 70 °C		-10 ~ 70 °C		-10 ~ 70 °C	
SHOCK	30 G		50 G		50 G	
VIBRATION	9 G		9 G		9 G	
ENCLOSURE CLASSIFICATION	IP 67 (EN60529)		IP 67 (EN60529)		IP 67 (EN60529)	
PROTECTION CIRCUIT	—		Surge Suppression		Power Reverse Polarity; Surge Suppression	
CE Certificate NO.	No. E8N 1104 53334 005		No. E8N 1104 53334 004	No. E8N 1104 53334 006	—	
3C Certificate NO.	No. : 2004010305127433		—	—	—	
CNEx Certificate NO.	CNEx16.2333X(ExnClIICt6GC)		CNEx16. 1850 (ExiallBT6Ga)	CNEx16. 1851 (ExiallBT6Ga)	—	
Connection Diagram						
CC-17R(RV)-QD8 CC-17R(RV)-QD12 CC-17R(RV)-EZ2M	CC-17RD CC-17RD-QD8 CC-17RD-QD12 CC-17RD-EZ3M	CC-17DF-QD8 CC-17DF-QD12 CC-17DF-EZ2M	CC-17N(P)-QD8 CC-17N(P)-QD12 CC-17N(P)-EZ3M	M8, M12, EZ QUICK CONNECTOR(IEC61076-2-101) 2 wire QD wiring M83M Brown(+).1 Blue(-).3 M124M Blue(-).3 Brown(+).1 Blue(+).4 EZ2M Blue(-).2 Brown(+).1 Brown(+)	3 wire QD wiring M83M Brown(+).1 Blue(-).3 M124M Blue(-).3 Brown(+).1 Blue(+).4 EZ3M Blue(-).2 Black(OUT).1 Brown(+)	

NOTE: The max operating voltage of CC-17R-QD8 is 60V AC/DC (Based on IEC61076-2-101).



Phone: +1-484-753-2655
Email: info@cersellcompany.com